

MUTRADE
MUTRADE INDUSTRIAL CORP.



Hydro-Park 3130/3230/3320

工业级 4 柱叠板设备

注意：本样册中提到和引用的标准设备参数和图纸标识的内容会随着时间有细微的调整和变化，请在购买设备时与我们的销售人员再次确认相关细节。



C E R T I F I C A T E 

of Conformity
EC Council Directive 2006/42/EC
Machinery

Registration No.: AM 50426783 0001
Report No.: 17707638 001

Holder: Qingdao Hydro Park Machinery Co., Ltd.
No. 106 Haier Road, Tongji Street Office
Jimo, Qingdao 266200
P. R. China

Product: Parking System of motor vehicles
(Four Post Parking Lift)

Identification: Type Designation: Hydro-Park 3130 Hydro-Park 3230
Serial No: Engineering sample
Tested acc. to: EN 14010+A1:2009
Remark: Refer to test report 17707638 001 for details.

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. This is to certify that the tested sample is in conformity with all provision of Annex I of Council Directive 2006/42/EC, referred to as the Machinery Directive. This certificate does not imply assessment of the production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex II of the Directive.

Date 20.04.2019

Certification Body

TÜV Rheinland LGA Products GmbH
TÜVRheinland
Leiningen, Germany
GM.-Ing. T. Fuhrmann

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

CE The CE marking may be used if all relevant and effective EC Directives are complied with. CE

© TÜV, TÜV and TÜV are registered trademarks. Any use or application requires prior approval.



> 产品介绍

四柱系列 HP3130 和 3230 是由我司研发生产的简易类立体停车设备。该设备在过去 10 年中行销全球 90 多个国家, 累计销售 8,000 余台, 服务各大著名汽车厂商。该系列设备以液压驱动, 结构简单, 质量可靠, 操作方便, 经久耐用, 广受汽车生产、物流等行业青睐, 是一款稳定性极高的工业生产用储车设备。

产品特性

- 工业级设计
- 世界最流行的储车设备
- 载车板互座, 通过性高
- 独特的立柱共享设计
- 单车 3000kg 载重, 可停大型车
- 每层 2034mm-2570mm 可用宽度
- 手动解锁和手离即停操作装置
- 油缸锁止防坠装置
- 先进的泵站共享技术
- 高强度, 防锈, 防腐蚀螺栓
- 抗震设计配件(可选)
- 表面静电喷涂处理(阿克苏诺贝尔粉末)
- 德国莱茵 (TUV Rheinland) CE 认证

部件名称



① 边梁

② 横梁

③ 斜支撑

④ 载车板

⑤ 立柱

⑥ 警示灯

⑦ 控制盒

⑧ 解锁手柄

⑨ 油缸

设备参数

设备型号	HP3130	HP3230	HP3320
停车数辆	3	4	5
设备载重	3000kg	3000kg	2000kg
进车宽度	2044-2072mm	2044-2100mm	2000-2100mm
进车高度	2000mm	1980mm	1550mm
上车板高度	86mm	106mm	140mm
锁定 / 解锁方式	手动	手动	手动
泵站功率	5.5kw	7.5kw	7.5kw
动力电压	380V、50HZ、3P	380V、50HZ、3P	380V、50HZ、3P
操作方式	钥匙开关	钥匙开关	钥匙开关
举升时间	<80s	<120s	<150s
表面处理	静电喷涂	静电喷涂	静电喷涂
驱动方式	液压 + 钢丝绳 + 提升杆	液压 + 钢丝绳 + 提升杆	液压 + 钢丝绳 + 提升杆
液压油	L-HM-46	L-HM-46	L-HM-46
装车数量	1A4B	1A2B	1A2B

公共
停车



商务区
停车




汽车
展示





汽车
储存
(货架)



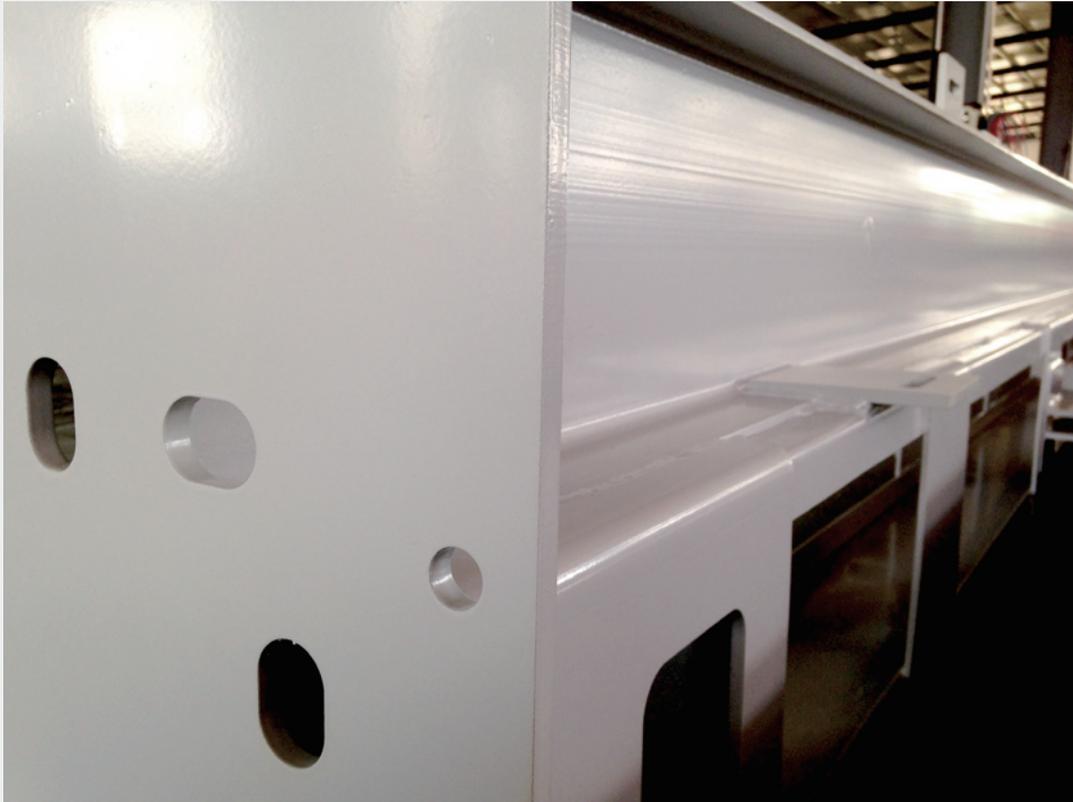

本设备整机表面处理使用静电喷涂，静电粉末使用世界著名品牌阿克苏诺贝尔，静电喷涂表面吸附力强，颜色鲜艳持久，防锈，耐腐蚀，十分美观，耐用。



安全配置

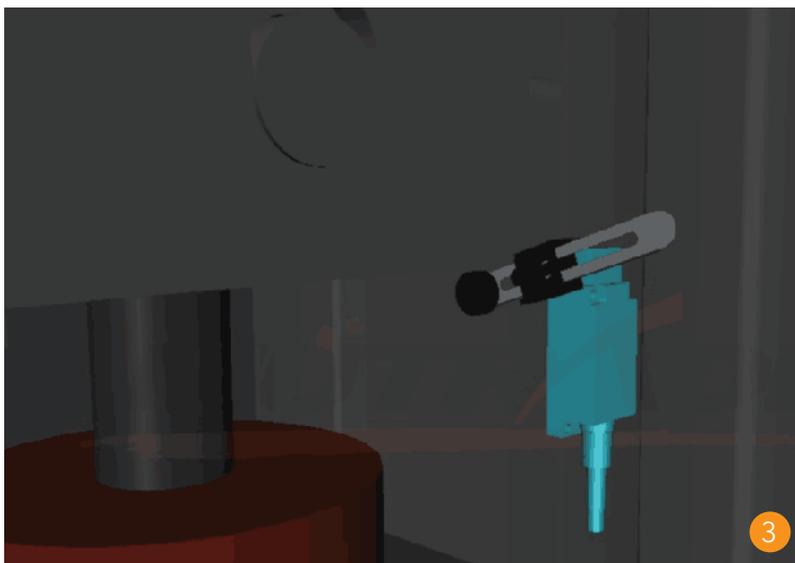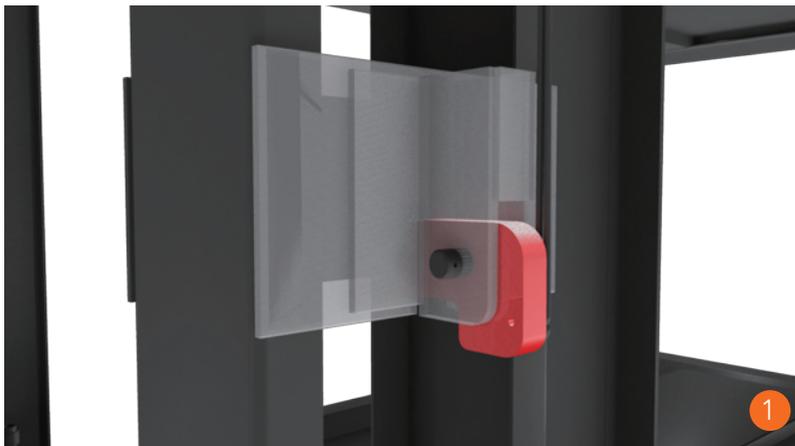



- 1 油缸防坠锁
- 2 警示灯, 手离即停钥匙开关, 急停按钮, 24V 控制开关
- 3 限位开关

规格

> Hydro-Park 3130

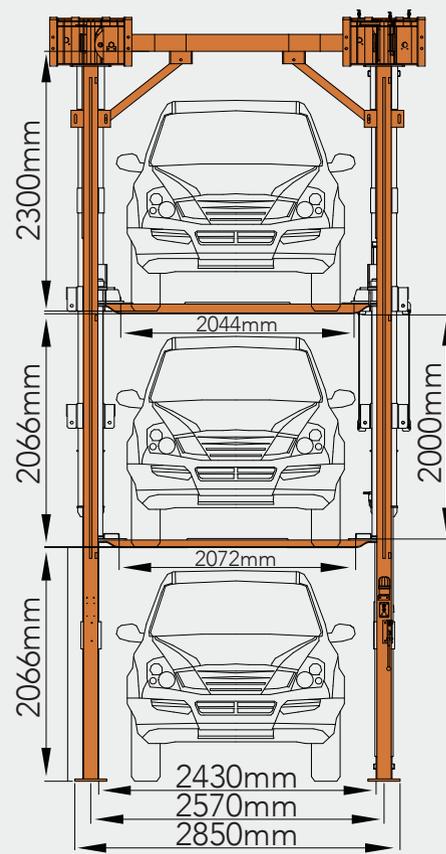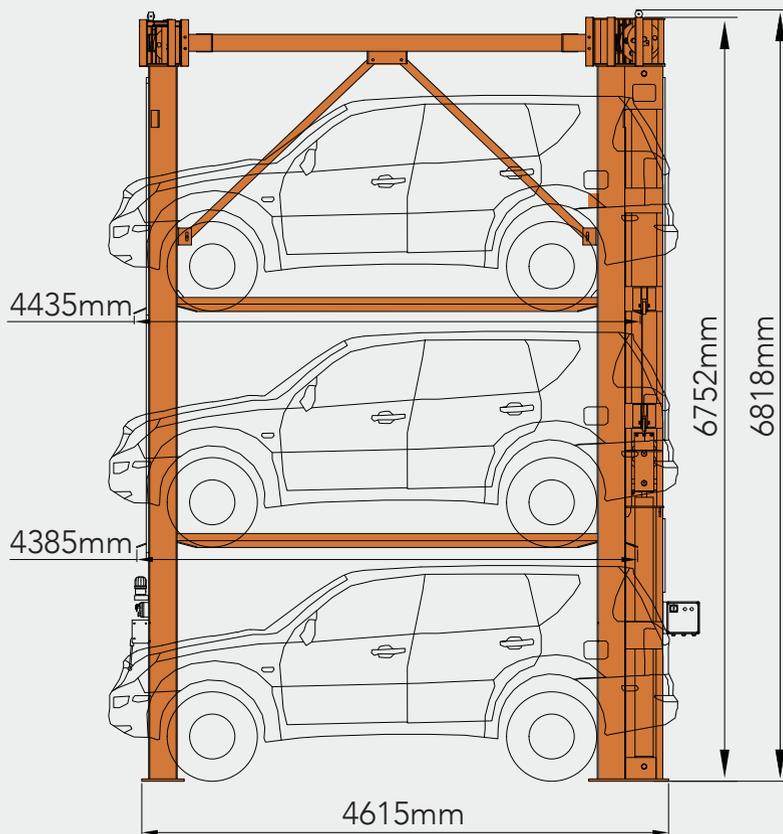

> Hydro-Park 3230

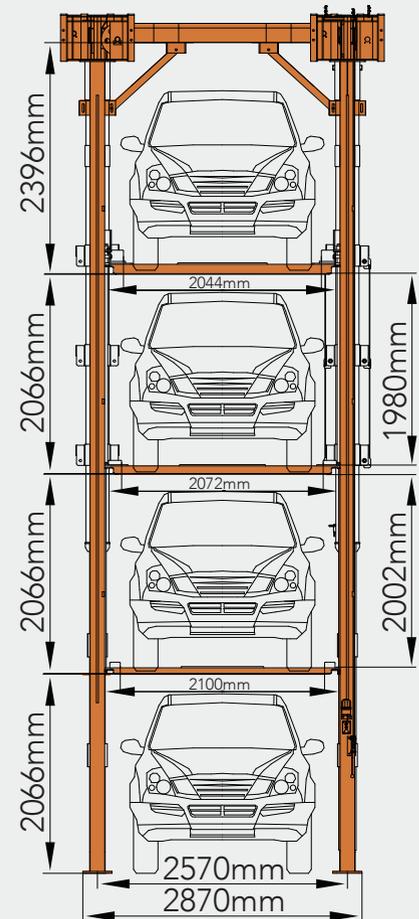
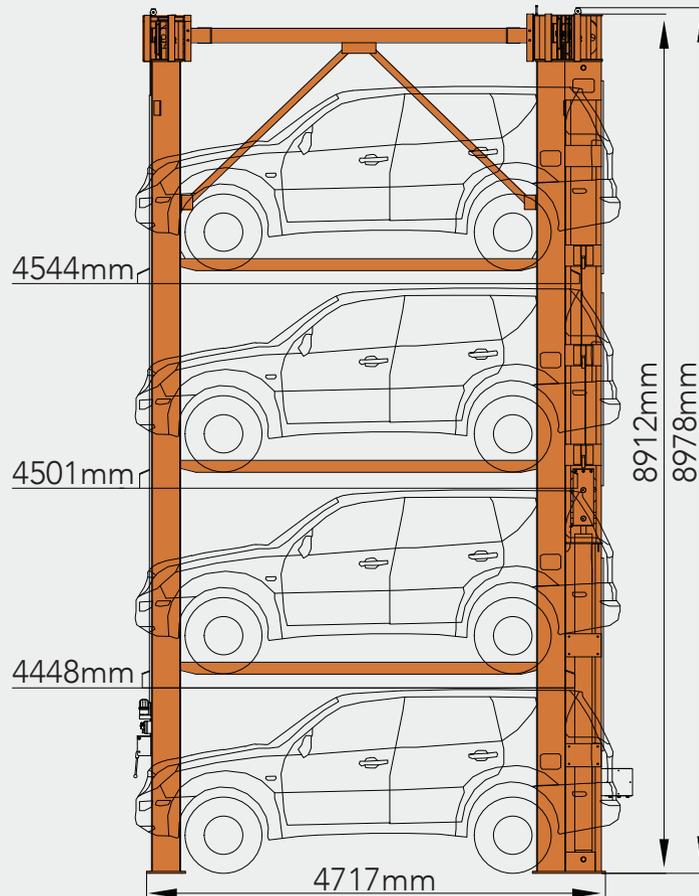


共享功能介绍

HP3130, HP3230 系列产品有独特设计的立柱共享功能,可以将同一排两台相邻设备的立柱合并。


合并后的设备占地更小,强度更高,成本更低。

我们称每一排设备的第一台完整设备为 A,其他共享立柱的设备为 B。

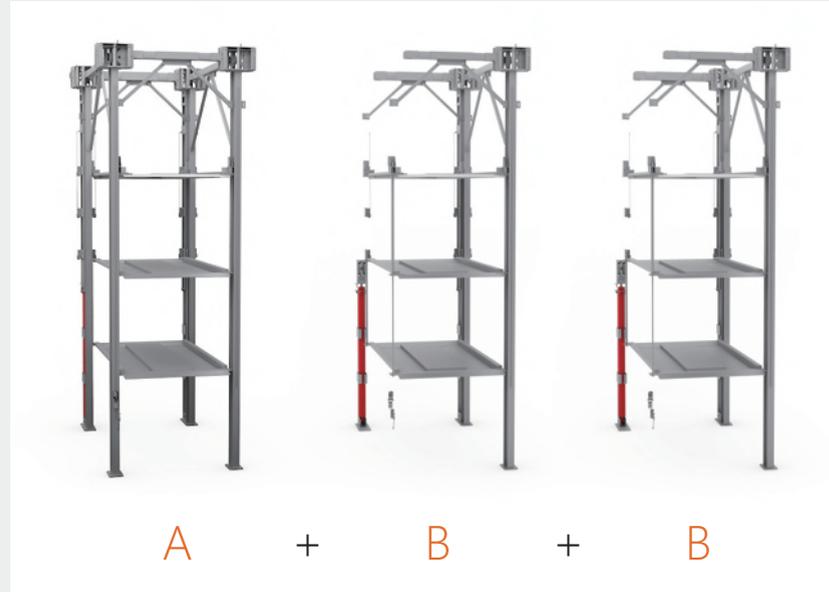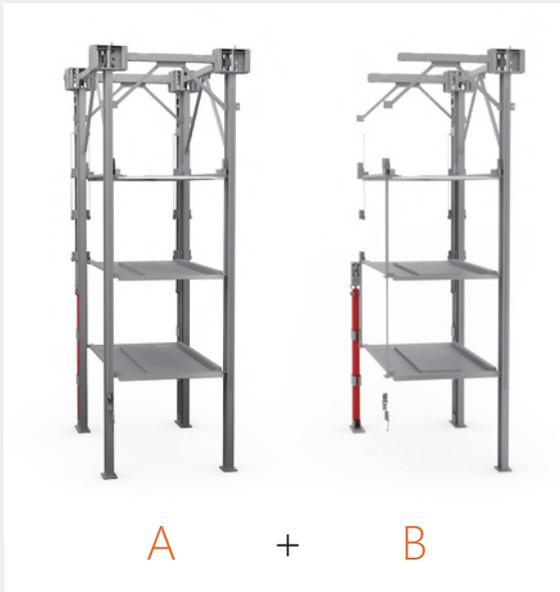


共享设备宽度对照表


1 台设备总宽和可用宽表

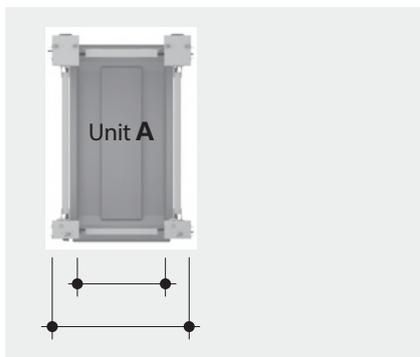

2 台共享设备总宽和可用宽表

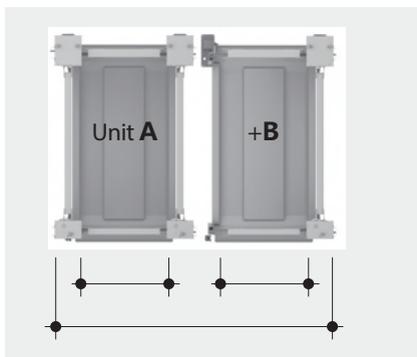

3 台共享设备总宽和可用宽表

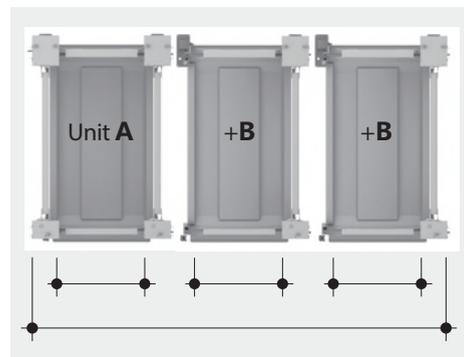

> Hydro-Park 3130

设备总宽度	可用停车宽度
A3290	2386
	2072
	2044

设备总宽度	可用停车宽度
A3290 +B2570 = 5860	2386
	2072
	2044

设备总宽度	可用停车宽度
A3290 +B2570 +B2570 = 8430	2386
	2072
	2044

> Hydro-Park 3230

设备总宽度	可用停车宽度
A3328	2366
	2100
	2072
	2044

设备总宽度	可用停车宽度
A3328 +B2570 = 5898	2366
	2100
	2072
	2044

设备总宽度	可用停车宽度
A3328 +B2570 +B2570 = 8468	2366
	2100
	2072
	2044

项目案例



